



## “NEW” 4033 Pro-Torque™

The NEW 4033 Pro-Torque™ & 4033SG Pro-Torque™ provide customers with a new and improved design, eliminating the #1 cause of rod rotator failure since the original development. The “NEW” one-way bearing design simplifies rotator mechanics, increasing runtimes and reducing downtime and maintenance costs.

### 4033 Pro-Torque™




Max.  
Recommended  
Load 40,000  
lbs.

### 4033SG Pro-Torque™



#### Retro-Fit Kit

WSI retro fit kits are available for converting existing WSI 3302 & 3302SG rotators, from the ratchet pawl design to the 4033 one-way bearing model with simple assembly modifications. Ask a WSI representative if your current rotator can be modified

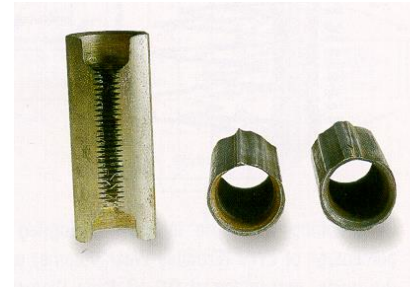

An example of coupling wear as a result of not running rod rotators

## “Customer Corner”

- 4033 design field tested over 10 months, in multiple fields without failure
- Extend tubing and rod life with rod rotator and/or rod guide combination
- Effectively reduces paraffin buildup, decreasing chemical program costs
- Maximize guide spend due to rotating and wearing 100% of guide versus 25% without